


HI-FU2-2

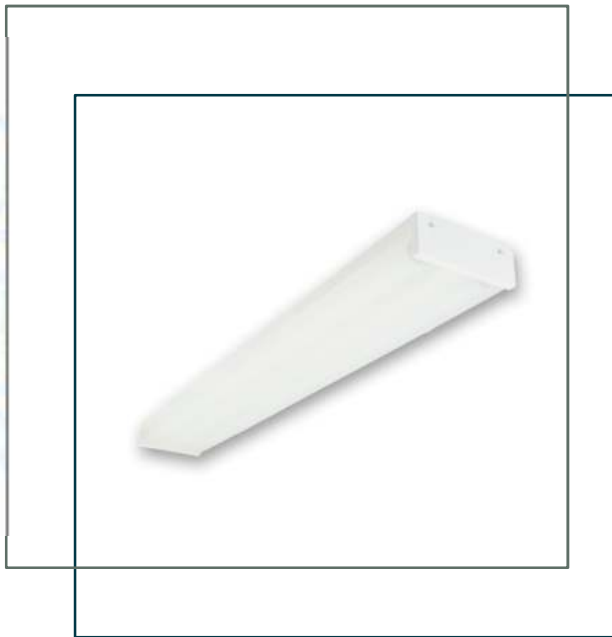

## SPECIFICATION

- HOUSING** (HI-FU2-XXXX) HIGH GRADE COLD-ROLLED STEEL SHEET FORMED BY HIGH QUALITY MACHINES, (HI-FU2-XXXX) EXTRUDED ALUMINIUM
- SURFACE TREATMENT** ION-PHOSPHATE AND ANTI-RUST FINISHED WITH UV RESISTANT WHITE POLYESTER POWDER COAT
- REFLECTOR(OPTIONAL)** PARABOLIC HIGH PURITY ANODIZED ALUMINIUM 99.85% MIRROR (DIN 5036-3) FROM GERMANY
- DIFFUSER** EXTRUDED ACRYLIC RIBBED PATTERN ON INSIDE FOR EVEN DIFFUSION
- WIRES** THW, TIS.11-1988 STANDARD
- LAMP HOLDER** ROTOR LOCKED TYPE HIGH-HEATRESISTANCE, TIS344-1987 STANDARD
- STARTER HOLDER** ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, TIS344-1987 STANDARD
- PROTECTION CLASS** PROTECTION CLASS EQUIVALENT TO IP 44
- INSTALLATION** SURFACE MOUNT OR SUSPEND MOUNT
- APPLICATION** OFFICE BUILDING, HOSPITAL, DEPARTMENT STORE, HOTEL, UNIVERSITY, FACTORY, SHOP, WAREHOUSE, RESIDENTIAL, TOILET, CANTEEN, CLEAN ROOM, ETC.
- COMPLETE SET\*** INCLUDING BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP

MODEL	LAMP	LUMEN (lm.)	DIMENSION(mm.)			WEIGHT
			L	W	H	
HI-F U1-220	2x18W.T8	1300	635	200	70	4.20
HI-F U1-240	2x36W.T8	3250	1245	200	70	6.70

MODEL	DIMENSION(mm.) Ø H	LAMP HOLDER	LUMEN (MAX)	LAMP TYPE
