



HI-F V1-240

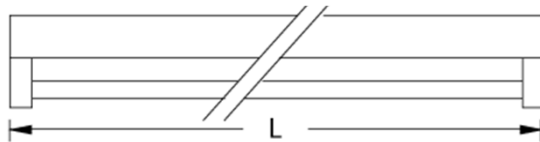

SPECIFICATION

HOUSING : FORMED HIGH GRADE COLD-ROLLED STEEL SHEET BY HIGH QUALITY MACHINES
SURFACE TREATMENT : ION-PHOSPHATE COATED ANTI-RUST WITH TOP FINISHED WITH UV RESISTANCE WHITE POLYESTER POWDER COATED
WIRES : THW, ACCORDING TO TIS.11-1988 STANDARD
LAMP HOLDER : SPRING LOCKED TYPE HIGH-HEAT RESISTANCE, ACCORDING TO TIS344-1987 STANDARD
STARTER HOLDER : ROTOR LOCKED TYPE HIGH-HEAT RESISTANCE, ACCORDING TO TIS344-1987 STANDARD
PROTECTION CLASS : PROTECTION CLASS EQUIVALENT IP 20
INSTALLATION : SURFACE MOUNTED OR SUSPEND MOUNTED
APPLICATION : FACTORY, WAREHOUSE, OFFICE BUILDING, DEPARTMENT STORE, CANTEEN, RESIDENTIAL, ETC.
COMPLETE SET* : INCLUDE BALLAST, LAMP, STARTER NORMAL FOR T8 LAMP



MODEL	LAMP	LUMEN (lm.)	DIMENSION (mm.)			CUT OUT (mm.)		WEIGHT (kg.)	PRICE (Baht.)	COMPLETE SET /*(Baht.)
			L	W	H	L	W			
HI-F V-240	2 X 36W. T8		1245	152	50	-	-	5.40		

