

LED A-Bulb Dimmable


The new LED A-Bulb Dimmable comes with 3 color temperatures options. Supports dimming the light when used in conjunction with dimmer switch. Dimming is create the right light for any activity with 10-100% brightness level. Eyes safety LED quality with 200 degree wide beam angle.

IEC standard

IEC 62560 : Self-ballasted LED-lamps safety

IEC 62471 : Photobiological safety

DIMENSION

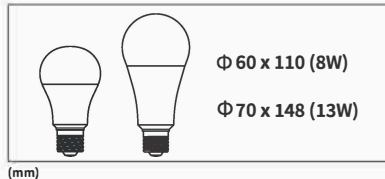

EQUIVALENT



ENERGY SAVING



Dimmable



MDP 2780-2562 TTL



MDP 1956-2551 TTL



Eye Safety IEC 62471

Product code	Shape	Voltage (Vac)	Rated Wattage (W)	Luminous Flux (lm)	Color Temperature	Efficacy (lm/W)	Color Rendering Index (Ra)	Beam Angle	Lifespan (Hrs.)	PRICE
RLDAC0830E7TH1DM	A60	220-240	8	860	3000K	107	80	200°	15,000h	185
RLDAC0840E7TH1DM	A60	220-240	8	860	4000K	107	80	200°	15,000h	185
RLDAC0865E7TH1DM	A60	220-240	8	860	6500K	107	80	200°	15,000h	185
RLDAC1330E7TH1DM	A70	220-240	13	1300	3000K	100	80	200°	15,000h	215
RLDAC1340E7TH1DM	A70	220-240	13	1300	4000K	100	80	200°	15,000h	215
RLDAC1365E7TH1DM	A70	220-240	13	1300	6500K	100	80	200°	15,000h	215

Operation temperature : -20°C to 40°C

*Recommended dimmer compatibility list

Brand	Model
Philips	LeafStyle 2M
Panasonic	WEG57912
Schneider Electric	3031H360M
Clipsal	3031H500M/K