

Z3U- V05- R(170 °)



-FEATURES -



- KOREA LED 2835 CHIP
- Wide beam Angle 170 °
- Reserve voltage protection circuit
- Wide viewing angle for even light flux
- Capable of wet exposed applications with Durable weather protective molding
- Pre-applied adhesive tape and screw mounting bolt
- Safety Operation with DC 12V

- CERTIFICATIONS-



- CE, UL(E349550), RoHs, KC, IP68, CB, BIS


- PRODUCTION DEMENTION & PACKAGE -

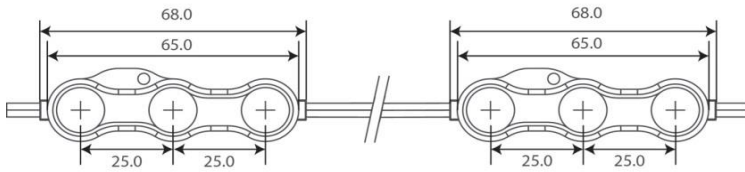

Dementions	Wire Length	Zipper polybag / Q'ty	Outer Box /Q'ty
68x15x7.1mm	78mm (3.15inch)	200pcs/bag	2,000pcs/box


- LIGHT DISTRIBUTION (170 °)

Luminous Intensity Distribution

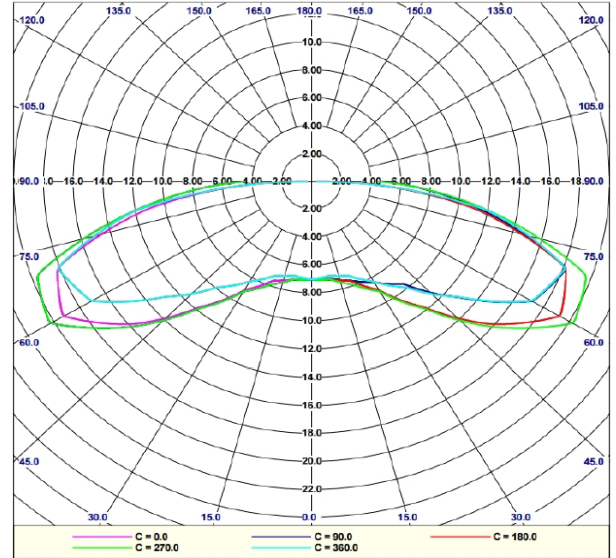

- Design Patent -

US D858, 809S US D861, 922S

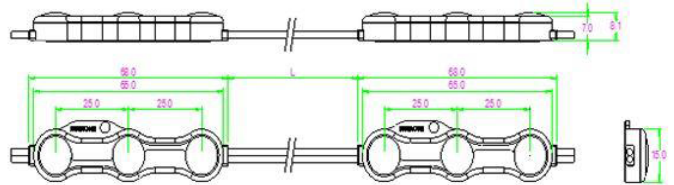

- SPECIFICATION -

Operation Votage	Power Consumption	Current	Viewing Angle	Intensity		Operation Temperature	Storage Temperature	Water Proof
				Lm/W	Lm			
DC12V	0.72W	100mA	170 °	17.5	21	-20 °C~60°C (-4°F~140°F)	-40 °C~75°C (-40°F~167°F)	IP68

Z3U-V05-BLUE(170°)



-FEATURES -

- KOREA LED 2835 CHIP
- Wide beam Angle 170°
- Wavelength - 475nm
- Long Life time 50,000hrs
- Reserve voltage protection circuit
- Wide viewing angle for even light flux
- Capable of wet exposed applications
- Pre-applied adhesive tape and screw mounting bolt
- Safety Operation with DC 12V
- Color BLUE


- CERTIFICATIONS-



- CE, UL(E349550), RoHs, KC, IP68, CB, BIS


- LIGHT DISTRIBUTION (170°)

Luminous Intensity Distribution

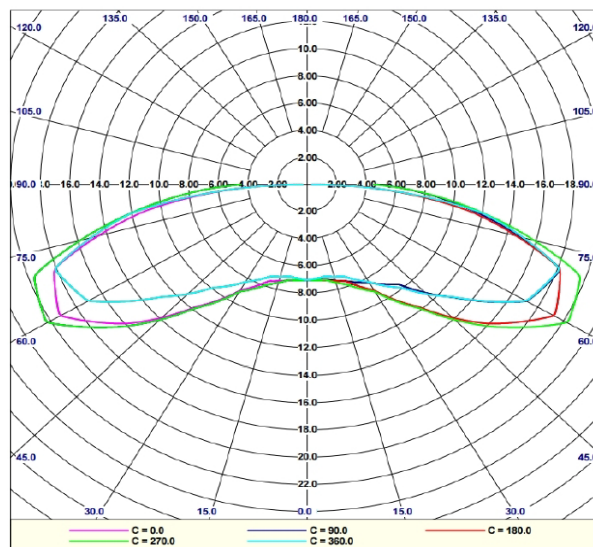


- Design Patent -

US D858, 809S US D861, 922S

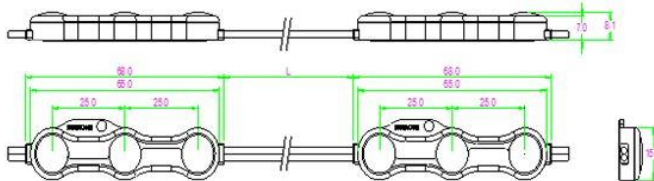

- PRODUCTION DEMENTION & PACKAGE -

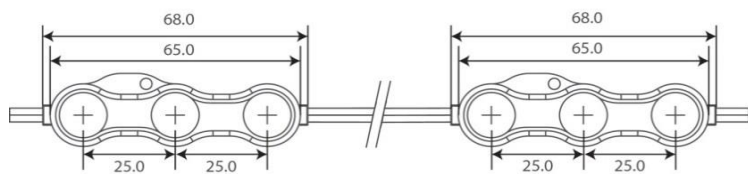

Dementions	Wire Length	Zipper polybag / Q'ty	Outer Box /Q'ty
68x15x7.1mm	78mm (3.15inch)	200pcs/bag	2,000pcs/box

- SPECIFICATION -

Operation Votage	Power Consumption	Current	Viewing Angle	Intensity		Operation Temperature	Storage Temperature	Water Proof
				Lm/W	Lm			
DC12V	0.72W	60mA	170°	12.5	9	-20°C~60°C (-4°F~140°F)	-40°C~75°C (-40°F~167°F)	IP68